


## Room Thermostats - November 2014



# thermostat

Comfort, ambience and practicality with Italian design and technology

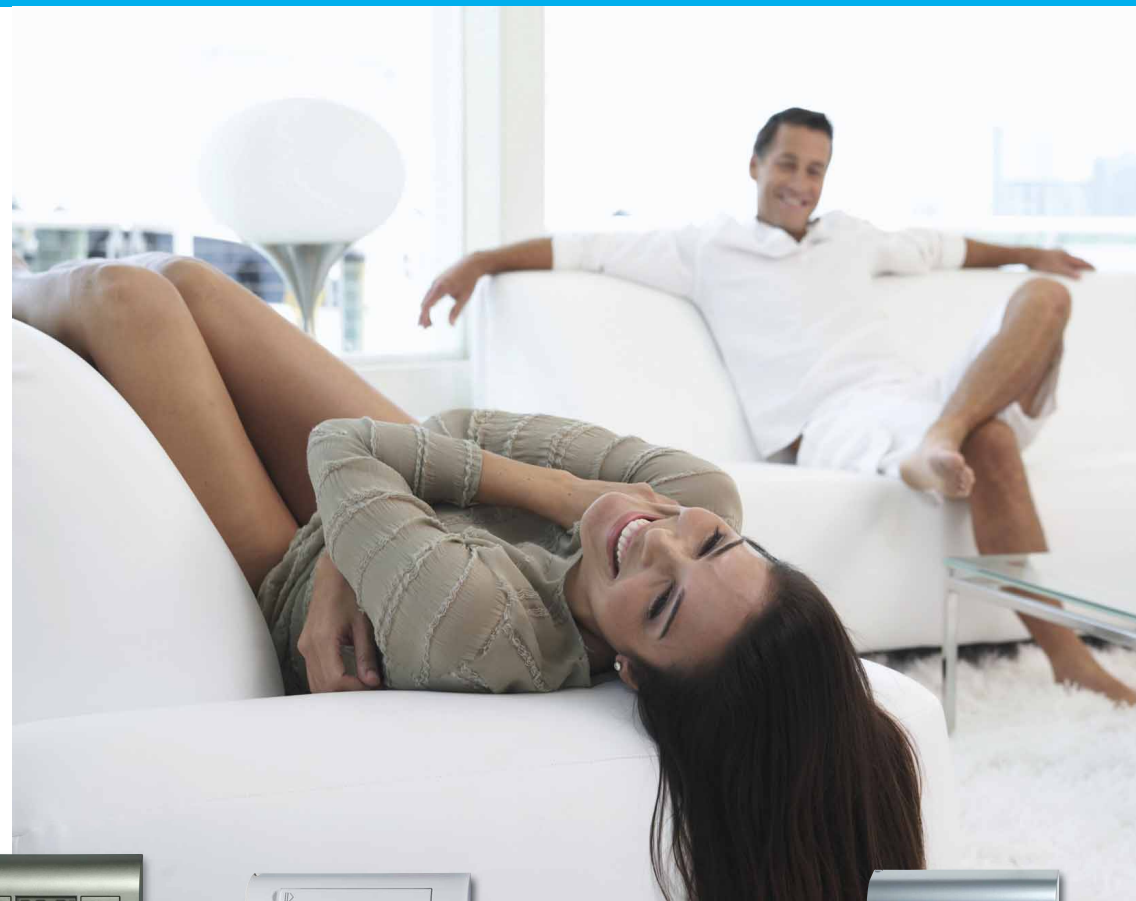

# Discover Finder's complete range of room thermostats



Chrono Touch Screen 1C.71



Chrono Touch Slide 1C.61



Recessed Chrono Touch Screen 1C.51



Digital Thermostat 1T.31



Digital Thermostat 1T.41



Basic Recessed Thermostat 1T.51



Basic Thermostat 1T.01



# Refined for your lifestyle



## Chrono Touch Screen



Type 1C.71 - Programmable Room Thermostat

### Technology with Elegance


2 x 1.5 V batteries (supplied)	Touch screen technology	Temperature setting range
Partial or Full lock with PIN code	Easy, intuitive guided programming	Audible confirmation of Key action
Weekly programmable	Manual or Auto modes	Manual Timed Override function
Heating or cooling control	Automatic changeover of Daylight Saving Time	Ultra-slim design (only 17 mm thick)
Wide temperature setting range	For radiators, convectors and under-floor heating	Frost protection programmable from 2 to 8 °C

### Choice of stylish finishes

#### Features:

- Room Thermostat weekly programmable
- Temperature setting range from 5 to 37 °C
- Alkaline batteries and mounting kit included
- Output contact rated 5 A - 250 V
- Switching hysteresis adjustable from 0.1 to 0.9 °C

Colour	Code
White	1C.71.9.003.0107
White, pearl effect	1C.71.9.003.0207
Metallic Grey	1C.71.9.003.1107
Metallic Silver	1C.71.9.003.1207
Metallic Anthracite	1C.71.9.003.2107
Titanium	1C.71.9.003.2207

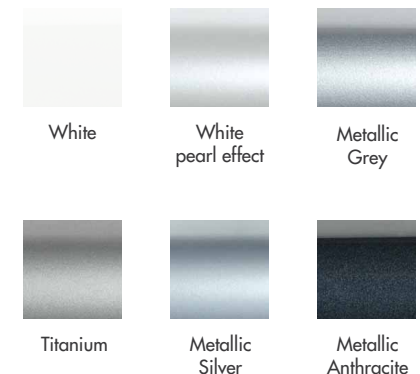

Comfort  
has never  
been  
so easy



## Chrono Touch Slide



Type 1C.61 - Programmable Room Thermostat

### INTUITIVE: guided programming

2 x 1.5 V batteries (supplied)	Display & configure (optional) external temperature sensor	Manual or Auto modes	Audible confirmation of Key action
Partial or Full lock with PIN code	5...37 °C Wide temperature setting range	Automatic changeover of Daylight Saving Time	Manual Timed Override function
Time setting to nearest 15 minutes	Touch screen technology	Recalibration of displayed temperature	Ultra-slim design (only 17 mm thick)
Heating or cooling control	Easy, intuitive guided programming	For radiators, convectors and under-floor heating	Control/override by remote contact
	Large display LED backlit	Frost protection programmable from 2 to 8 °C	

### IMMEDIATE: set and visualize by sliders

#### Features:

- Chronothermostat "touch slide" with wide display with weekly function
- Temperature setting range from 5 to 37 °C
- Alkaline batteries and mounting kit included
- Output contact rated 5 A - 250 V
- Switching hysteresis adjustable from 0.1 to 0.9 °C



White



Metallic Anthracite

### EASY: only a few keys

- Customizable functions
- Advanced electronic technology
- Weekly function

Colour	Code
White	1C.61.9.003.0101
Metallic Anthracite	1C.61.9.003.2101

# Program from wherever you're comfortable



## Recessed Chrono Touch

NEW



Type 1C.51 - Programmable Room Thermostat

### REMOVABLE: Programmable away from the wall

2 x 1.5 V batteries	Wide temperature setting range 5...37 °C	Manual or Auto modes	Temperature setting range
Partial or Full lock with PIN code	Large display LED backlit	Automatic changeover of Daylight Saving Time	Audible confirmation of Key action
Weekly programmable	Touch screen technology	For radiators, convectors and under-floor heating	Manual Timed Override function
Heating or cooling control	Easy, intuitive guided programming	Control/override by remote contact	Compatible with 3 module housing
			Frost protection programmable from 2 to 8 °C

### BRIGHT: Illuminated touch screen

#### Features:

- Weekly Programmable thermostat for recessed box
- Temperature setting range from 5 to 37 °C
- Mounting kit included
- Summer/Winter switch
- Output contact rated 5 A - 250 V
- Switching hysteresis adjustable from 0.1 to 0.9 °C



White



Black

### VERSATILE:

- Compatible with 3 module housing
- Complete with adaptor for following frames:
  - ABB (Chiara e Mylos), Ave (S44)
  - BTicino (Axolute, Light, Light tech, Living, Livinglight, Matix)
  - Gewiss (Chorus),
  - Vimar (Arkè, Eikon, Eikon Evo, Idea, Plana)

Colour	Code
White	1C.51.9.003.0007
Black	1C.51.9.003.2007





# Logical and precise

## Digital Thermostat



Type 1T.31 - Room Thermostat

### COMPACT and sleek



2 x 1.5 V  
batteries  
(supplied)



Thermostat  
lock



Heating or  
cooling control



Nighttime  
temperature  
set-back



Ultra-slim design  
(only 17 mm  
thick)



Wide  
temperature  
setting range



For radiators,  
convectors and  
under-floor heating




Frost protection  
programmable  
from 2 to 8 °C

### Choice of stylish finishes


#### Features:

- Independently set temperatures for Day and Night
- Alkaline batteries and mounting kit included
- Output contact rated 5 A - 250 V

Colour	Code
White basic	1T.31.9.003.0000
Black basic	1T.31.9.003.2000
White	1T.31.9.003.0100
White, pearl effect	1T.31.9.003.0200
Metallic Grey	1T.31.9.003.1100
Metallic Silver	1T.31.9.003.1200
Metallic Anthracite	1T.31.9.003.2100
Titanium	1T.31.9.003.2200



White  
basic



White



White  
pearl effect




Metallic  
Grey



Titanium



Metallic  
Silver



Metallic  
Anthracite



Black  
basic

# Relax with its simplicity











## Digital Thermostat



Type 1T.41 - Room Thermostat

### EASY and intuitive

-  2 x 1.5 V batteries
-  Thermostat lock
-  Heating or cooling control
-  Nighttime temperature set-back
-  Ultra-slim design (only 17 mm thick)
-  Wide temperature setting range
-   $\Delta T$  0.3 For radiators, convectors and under-floor heating
-  Frost protection programmable from 2 to 8 °C

### QUICK dial control

#### Features:

- Temperature setting range from 5 to 33°C
- Mounting kit included
- Output contact rated 5 A - 250 V
- Temperature differential 0.3 °C
- Temperature setting range can be restricted, by internal mechanical blocking
- Functions: OFF (with Frost protection)/Summer/Winter
- Programming: Day/Night (set-back by -3°C)




White basic



Black basic

Colour	Code
White basic	1T.41.9.003.0000
Black basic	1T.41.9.003.2000



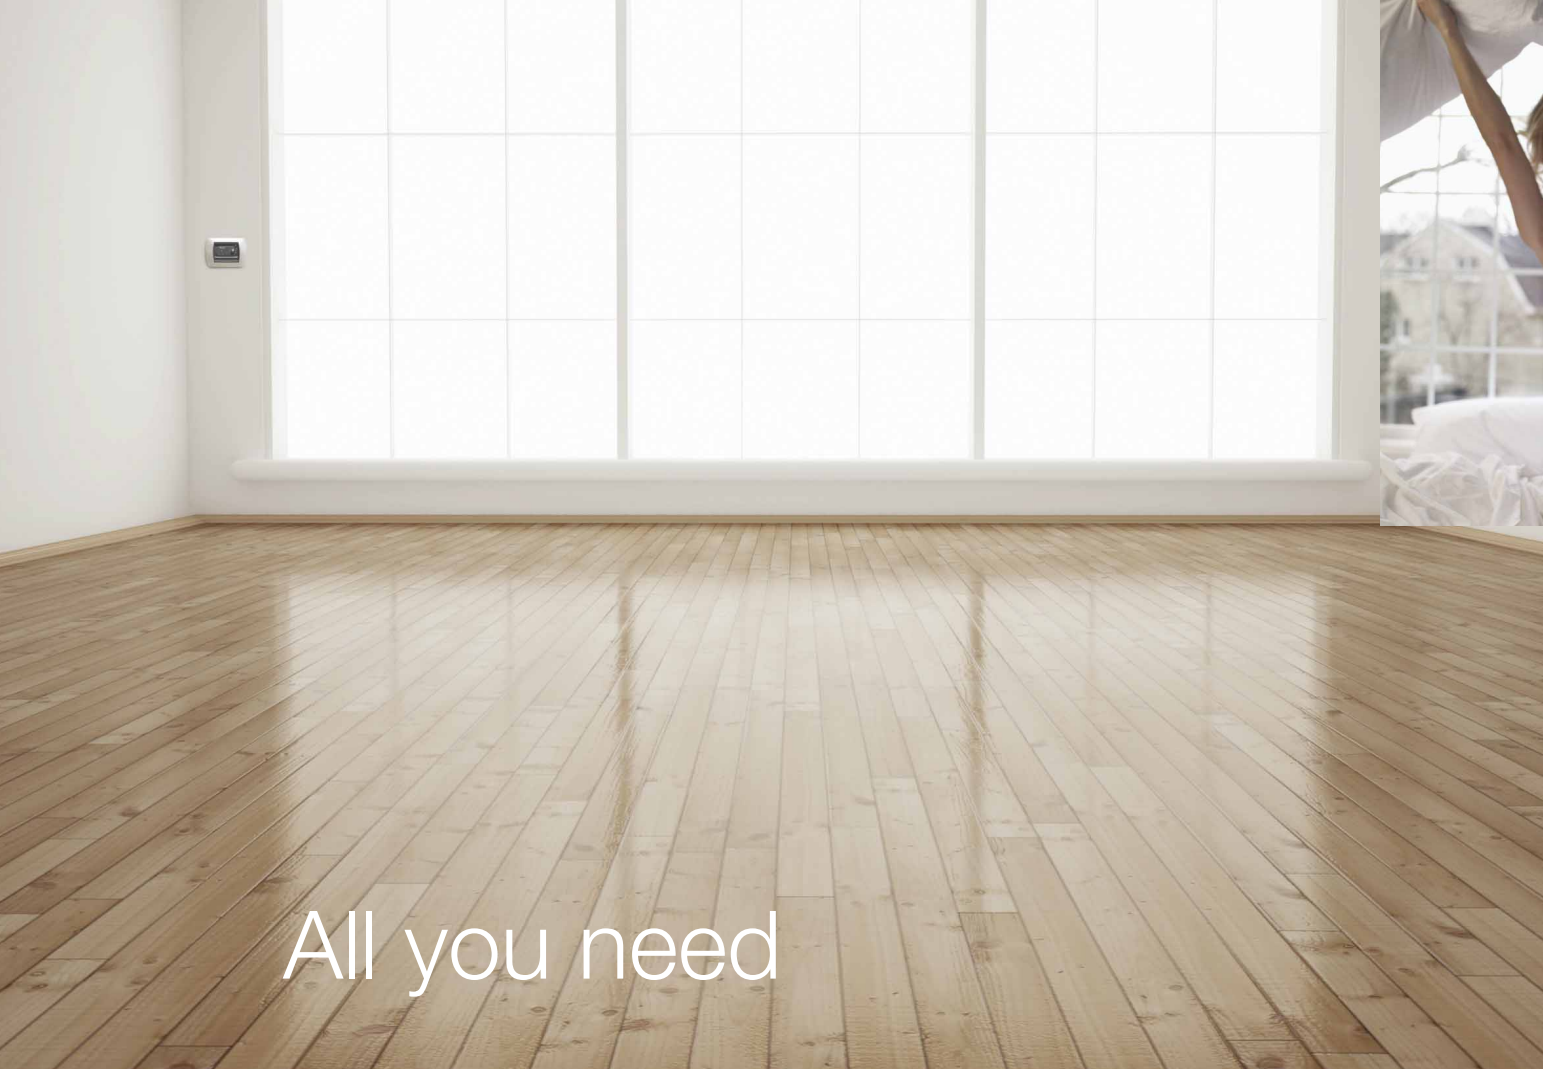

All you need

## Basic Recessed Thermostat



Type 1T.51 - Room Thermostat

### EASY to use



Mains supply  
230 V AC



For radiators,  
convectors and  
under-floor heating



Wide  
temperature  
setting range

### LOGICAL: simple control


#### Features:

- Compatible with 3 module box
- Temperature setting range from 5 to 30 °C
- Output contact rated 5 A - 250 V
- Complete with adaptor for following frames:
  - BTicino Living International,
  - Gewiss Playbus and Playbus Young,
  - Vimar Idea and Idea Rondo



Black  
basic

Colour	Code
Black basic	1T.51.8.230

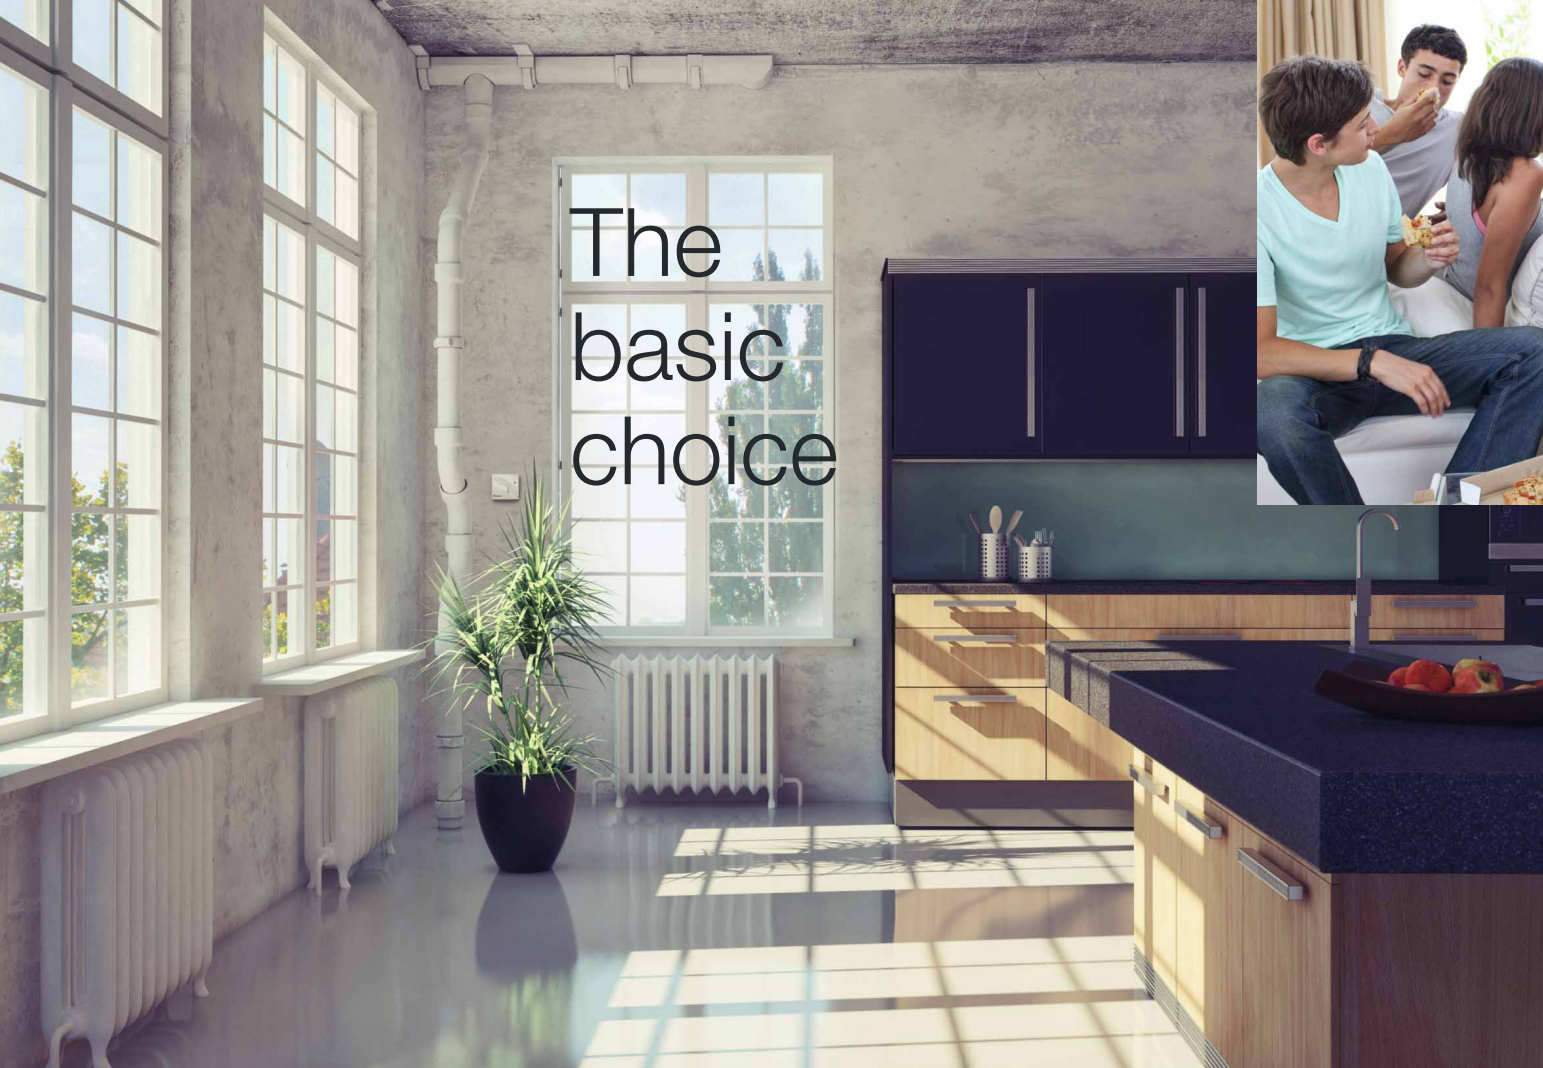

## Basic thermostat



Type 1T.01 - Room Thermostat

## MANUAL control



Wide  
temperature  
setting range



Thermostat  
lock



For radiators  
and  
convectors



Selector switch  
summer / winter

## USER FRIENDLY dial

### Features:

- Simple Gas bulb sensor
- Temperature setting range from 7 to 30 °C
- Output contact rated 16 A, 250 V AC
- Requires no power supply or batteries



White


Colour	Code
White	1T.01.0
White - ON/OFF selector	1T.01.1
White - Switch SUMMER/WINTER	1T.01.2

# Cronothermostats


# Digital Thermostats

# Thermostats


1C.71

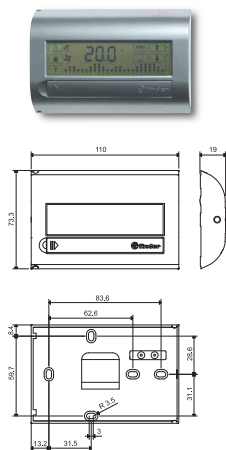

1C.61

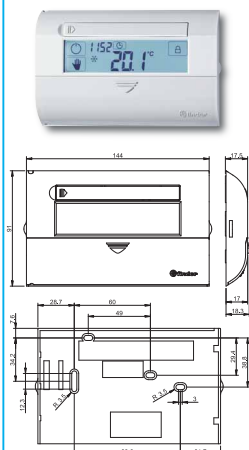

1C.51

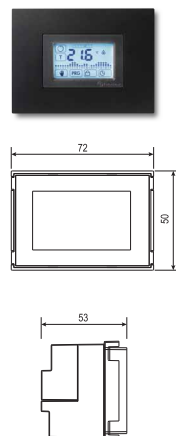


Sensing element	NTC	NTC	NTC
Supply	2 batteries 1.5V AAA	2 batteries 1.5V AAA	2 batteries 1.5V AAA
Contact configuration	1 CO (SPDT)	1 CO (SPDT)	1 CO (SPDT)
Contact rating	5 A 250 V AC	5 A 250 V AC	5 A 250 V AC
Display range	0...50 °C	0...50 °C	0...50 °C
Temperature setting range	5...37 °C	5...37 °C*	5...37 °C
Temperature differential	0.1...0.9 °C	0.1...0.9 °C	0.1...0.9 °C
Temperature rate off change	—	—	—
Nighttime set-back	—	—	—
Thermostat lock	code	code	code
Protection category	IP20	IP20	IP20
Mounting	surface	surface	recess (3 module box)
Display resolution	0.1 °C	0.1 °C	0.1 °C
Accuracy at 20°C	+/-0.5 °C	+/-0.5 °C	+/-0.5 °C
Frost Protection	+2...+8 °C	+2...+8 °C	+2...+8 °C
programming interval	1 h	1 h or 15 min	1 h
D(Daily)/W(Weekly)	D/W	D/W**	W
Buttons	touch screen	touch screen	touch screen
Backlit display	NO	YES	YES


\* with slider: winter 6...24°C  
summer 18...30°C

\*\* Excluding weekly function


1T.31

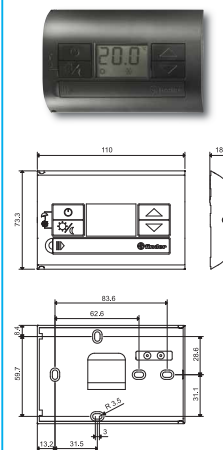


1T.41

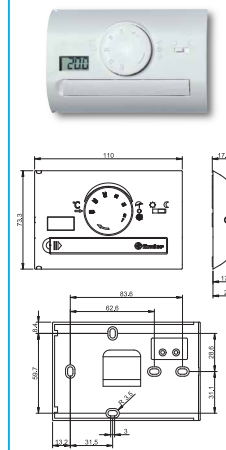

1T.51

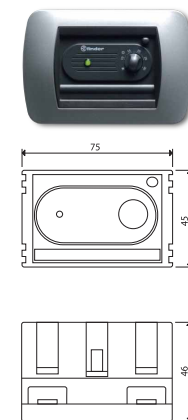

1T.01.x

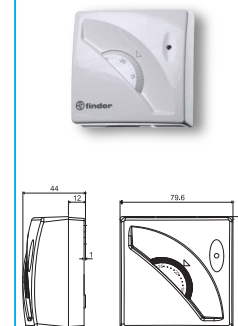

NTC	NTC	NTC	Gas bulb
2 batteries 1.5V AAA	2 batteries 1.5V AAA	230 V AC	—
1 CO (SPDT)	1 CO (SPDT)	1 CO (SPDT)	1 CO (SPDT)
5 A 250 V AC	5 A 250 V AC	5 A 250 V AC	16 A 250 V AC
0...50 °C	0...50 °C	—	—
5...37 °C	5...33 °C***	5...30 °C	7...30 °C
0.2/0.5 °C	0.3 °C	0.2 ≥ 0.4 °C	0.4 ≥ 0.8 °C
—	—	1°C/15 min	1 °C/15 min
YES	YES	NO	NO
buttons	buttons	NO	mechanical
IP20	IP20	IP20	IP20
surface	surface	recess (3 module box)	surface
0.1 °C	0.1 °C	—	—
+/-0.5 °C	+/-0.5 °C	—	—
2...8 °C	5 °C	—	—
—	—	—	—
mechanical	mechanical	mechanical	mechanical
NO	NO	NO	NO

\*\*\* Temperature setting range:  
- winter 8-30°C (reducing night: 5-27°C)  
- summer 18-30°C (reducing night: 11-33°C)







 **FINDER SpA**  
 Via Drubiaglio, 14  
 10040 ALMESE (TO) - ITALY  
 Tel. +39 011 9346211  
 Fax +39 011 9359079  
**export@findernet.com**

**[www.findernet.com](http://www.findernet.com)**